

SCOOTER 4666/9





- Hood with fan
- Overdimensioned heat exchanger meaning high efficiency and low consumption (SC)
- Atmospheric strip burner for natural gas or L.P.G. (SC)
- Separate circuits for fumes and baking air (SC)
- Armored el/elements heat generator (SE)
- Automatic start
- Frame for rack removable (rack optional)
- Halogen lamps on the door, for easy replacement without tools
- Door with double glass.
- Option: steamer with liter-counter

PROOF BOX

- Armored el/element with thermo stat for heating
- Water basin with ball-cock and electric element for humidity
- Inner ventilation for even air distribution
- Electro-mechanical keyboard

Line feeder	400/3N~/50 Scooter 230/1~/50 cell
Water Inlet	Diameter 1/2"
Gas pipe inlet	Diameter 3/4"
Fumes exhaust	Diameter 150 mm
Steam exhaust	Diameter 120 mm

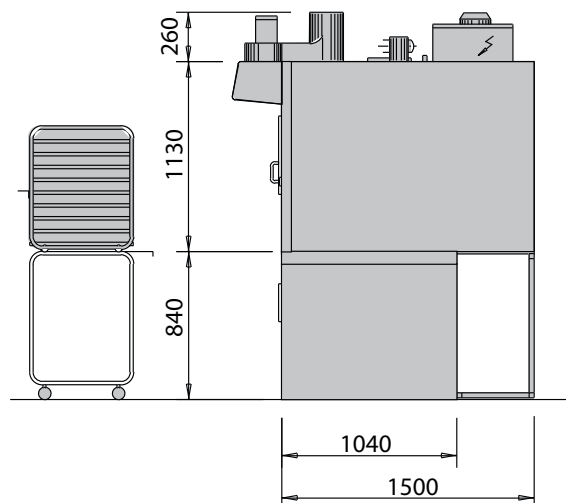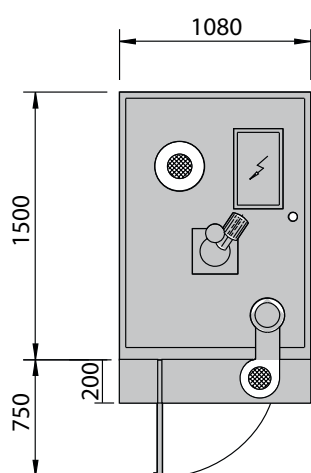

	Pan capacity		Pan size	Minimum door width	Weight	Electrical power	
	n°	passo	mm	mm	kg	kW	
SCOOTER 4666/9	7	102	400x600	1100	350	1,3	
	9	80	460x660				
CELL	14	88	400x600	850	80	2,0	