


DRAGO 896



- Width 124 - 5 decks
- N° 1 increased steamer for each deck
- Baking plates in "fibre-cement"
- Hood with exhaust fan
- Chimney silencer and soundproof panels in the bench
- Safety thermostat
- Deck decompression discharge valve in the mouth
- Steam generators control by electrovalve with timer (SIMPLE excluded)
- Automatic start (excluding SIMPLE)
- Baking timer (excluding SIMPLE)

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ¾" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	-----
<i>Steam exhaust output</i>	Ø 250 mm*
<i>Fume exhaust pipe</i>	Ø 150 mm

* Minimum diameter pipe exhaust fumes 200 mm.

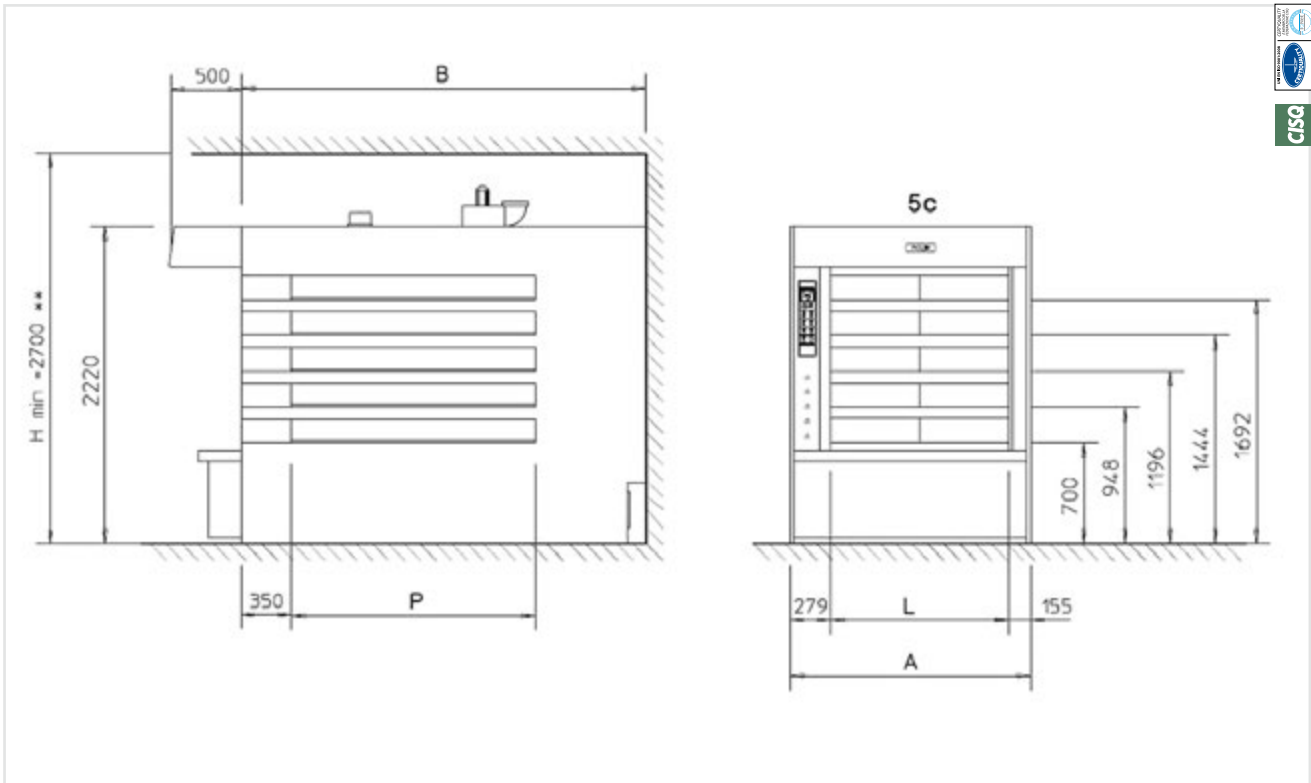

** 2800 with a 2 speed motor

	Baking Surface	Chambers	Useful Dimension Chambers		Overall dimensions		Installed power	
			Width	Depth	Width	Depth	Thermic	Electrical
	m ²	n°	L mm	P mm	A mm	B mm	kcal/hx1000	kW
10,5/124x170-5	10,5	5	1240	1700	1675	2820	80	5,2
13,3/124x214-5	13,3	5	1240	2140	1675	3260	90	5,2
16/124x258-5	16,0	5	1240	2580	1675	3700	98	5,2