


POCKET PELLET 4060



- Horizontal flame pellet burner with feeding screw and control system (excluded pellet tank)
- Extremely compact size
- Outside panels in st/st
- Oven shipped in 2 preassembled elements (installation in few hours) or fully assembled (optional)
- Automatic steam exhaust system (Fast Air 3 positions)
- Rapid cooling system
- Automatic start
- Hood with exhaust fan
- Double glass door
- Standard rotation device with hook (for racks up to 100 kg full load)
- Electric board with extended cables to hang it on oven's sides
- Aided drought kit flue gas circuit
- Possibility of air steam condenser, integrated in the hood (optional - installation without discharge chimneys in SE version)
- Possibility of burner on the right side (optional)
- Steam generator with cascade elements with spheres + liter-counter (optional)
- Available on versions FLEX 0.4H and HI CONTROL 0.12H depending on working hours
- Steel brush for exchanger tube cleaning
- Flue gas circuit draft control pressure switch kit

POWER INLET	400/3N~/50
FUMES DISCHARGE	Diam 150 mm
STEAM EXHAUST	Diam 150 mm

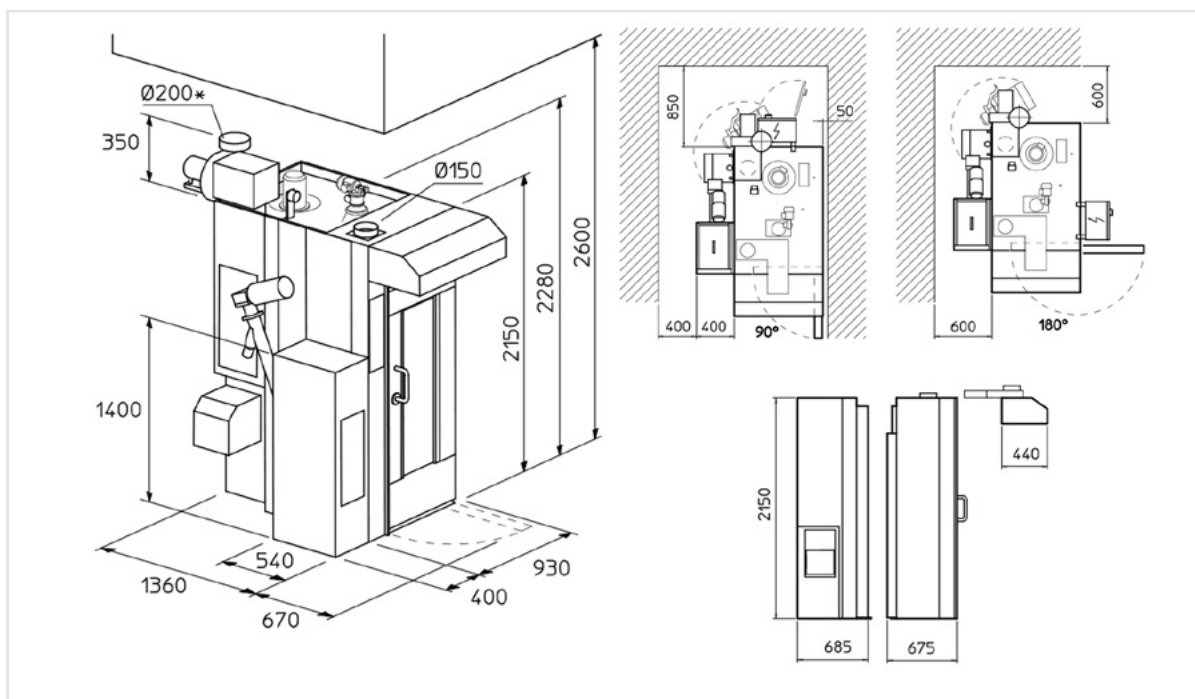

	Pan capacity		Pan size	Minimum door width	Weight	SC Version	
	n°	passo	mm	mm	kg	kW	kcal/h
POCKET PELLET 4060	15÷18	97÷81	400x600	730	800	2,9	25.000
POCKET PELLET 4060 + vaporiera	15÷18	97÷81	400x600	730	800	2,9	27.000