


ROTOPELLET AVANT HR



- Horizontal flame pellet burner with feeding screw and control system (excluded pellet tank)
- Modular steam generator, with cascade elements with spheres (great steam production)
- Steamers with automatic feed
- Hood with improved exhaust fan and fat box
- Door with double glass and double closing
- USB connection
- Automatic steam exhaust system (Fast Air 3 positions)
- Manual emergency steam exhaust valve
- Rapid cooling valve
- Automatic start
- Standard rotation device with hook (for ergonomic reasons it's recommended for racks up to 100 kg full load)
- Electric board with extended cables to hang it on oven's sides.
- Aided draught kit flue gas circuit
- Oven with burner on the right is available (optional - Excluded 80120)
- Preset for automatic lifting group by lever (optional - Excluded 80120)
- Available on versions FLEX ENERGY 0.8H and HI CONTROL 0.20H depending on working hours
- Steel brush for exchanger tube cleaning
- Standard st/st exterior panel
- Flue gas circuit draft control pressure switch kit

POWER INLET	400V/3N~/50
FUME EXHAUST	Ø 200
STEAM EXHAUST	Ø 250

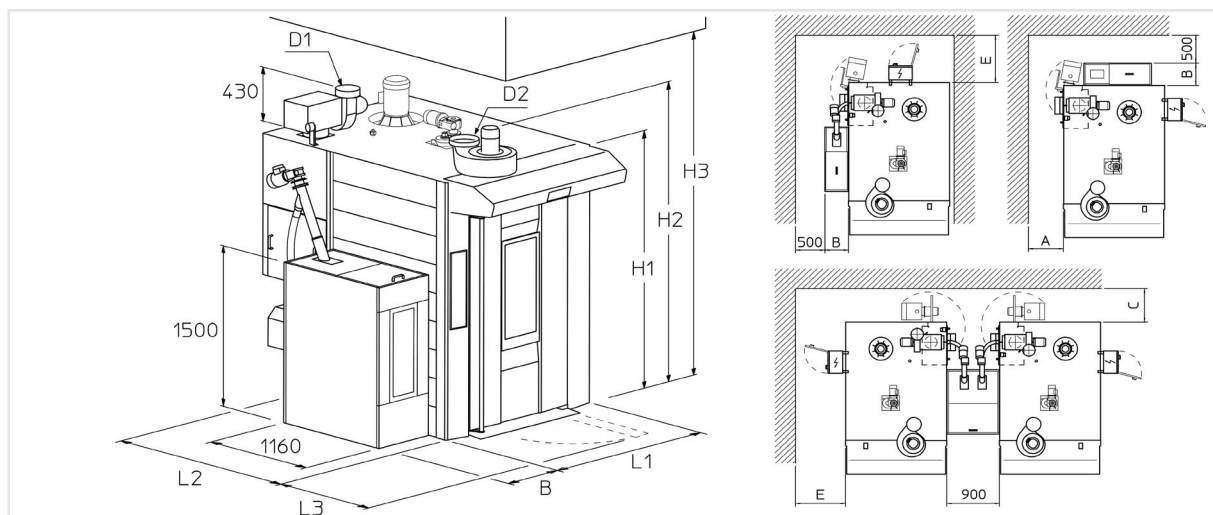

Tipo forno Oven	L1 mm	L2 mm	L3 mm	H1 mm	H2 mm	H3 mm	Scarico fumi Fume exhaust D1 Ø mm	Scarico vapori Steam exhaust D2 Ø mm	A mm	B mm		C mm	E mm
										Mod. standard	Mod. HC		
6080	1450	1980	910	2300	2670	2840	200	250 **	600	400	600	450	850
80100	1730	2270	1120	2400	2790	2980			600	400	600	550	850
80120	2000	2580	1120	2400	2790	2980			700	400	600	580	850

** Diametro min. tubazione = 200mm / Minimum diameter pipe = 200mm

	Pan capacity		Pan size	Minimum door width	Weight	Voltage	SC version
	n°	passo	mm	mm	kg	kW	kcal/h
ROTO PELLET 6080	16	105	600x800	500	1450	3,5	60.000
	18	93	2x600x400				
ROTO PELLET 80100	16	105	600x800	840	1900	3,8	80.000
	18	93	2x600x400				
ROTO PELLET 80120	16	105	800x1200	800	2200	4,2	95.000
	18	93	2x600x800				