


AUTOMATIC SHEETERS QUEEN A600



- Heavy duty steel stove painted structure (optional INOX)
- Standard colour: grey RAL 9007
- Colour touch screen 5" with the possibility to store and recall up to 100 different recipes (by using the same program used in the QUEEN TRONIC sheeters)
- Automatic dough sheeter with compact dimensions, gives the possibility to work in a very easy and safe way ensuring an every days precise lamination with every kind of products that we are going to work
- The strong chains transmission, together with the new gearmotor controlled by PLC ensure the maximum reliability and long life
- The foldable and removable tables make easier the every days cleaning of the machine and assure a minimum encumbrance once finished to work
- Optional: automatic flour duster and coiler

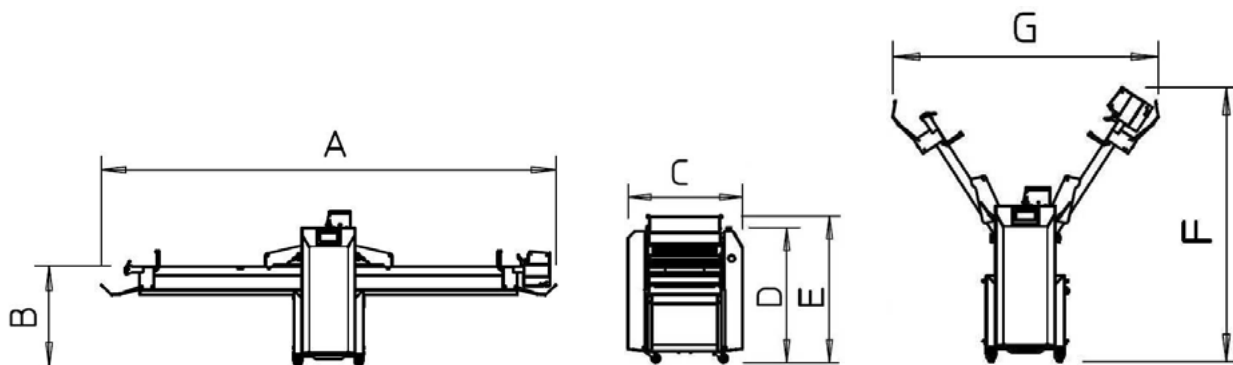

	Belts dimensions	Speed	Cylinder opening	Power	Voltage	Dimensions							Weight
						mm	m/min.	mm	kW	V~/Hz	mm		
						A	B	C	D	E	F	G	
TRONIC PLUS TRONIC MAN TRONIC	654/2000	10÷60	0÷60	2,1	400/3~/50	4530	870	1045	1230	1340	-	-	370
	654/1800	10÷60	0÷60	2,1	400/3~/50	4130	870	1045	1230	1340	-	-	370
	654/1600	10÷60	0÷60	2,1	400/3~/50	3730	870	1045	1230	1340	-	-	370
	654/1400	10÷60	0÷60	2,1	400/3~/50	3330	870	1045	1230	1340	2190	2185	370
	654/1200	10÷60	0÷60	2,1	400/3~/50	2930	870	1045	1230	1340	2025	1965	370
QA600 QS600	584/1500	10÷45	0÷50	0,75	400/3~/50	3485	870	1015	1345	1445	2430	1355	220
	584/1400	10÷45	0÷50	0,75	400/3~/50	3285	870	1015	1345	1445	2335	1290	220
	584/1300	10÷45	0÷50	0,75	400/3~/50	3085	870	1015	1345	1445	2245	1225	220
	584/1200	10÷45	0÷50	0,75	400/3~/50	2885	870	1015	1345	1445	2150	1160	220
	584/1000	10÷45	0÷50	0,75	400/3~/50	2485	870	1015	1345	1445	1960	1030	220
Q670	654/2000	35	0÷60	1,5	400/3~/50	4530	870	1170	1340	-	-		270
	654/1800	35	0÷60	1,5	400/3~/50	4130	870	1170	1340	2530	2630		270
	654/1600	35	0÷60	1,5	400/3~/50	3730	870	1170	1340	2360	2405		270
	654/1400	35	0÷60	1,5	400/3~/50	3330	870	1170	1230	2190	2185		270
	654/1200	35	0÷60	1,5	400/3~/50	2930	870	1170	1230	2025	1965		270
Q600	584/1500	35	0÷50	0,75	400/3~/50	3485	870	1050	1250	2250	1205		190
	584/1400	35	0÷50	0,75	400/3~/50	3285	870	1050	1250	2150	1140		190
	584/1300	35	0÷50	0,75	400/3~/50	3085	870	1050	1250	2060	1075		190
	584/1200	35	0÷50	0,75	400/3~/50	2885	870	1050	1250	1965	1010		190
	584/1000	35	0÷50	0,75	400/3~/50	2485	870	1050	1250	1775	880		190
Q500	488/1200	35	0÷40	0,55	400/3~/50	2855	850	865	1315	1960	800		160
	488/1000	35	0÷40	0,55	400/3~/50	2455	850	865	1315	1765	720		160
	488/900	35	0÷40	0,55	400/3~/50	2255	850	865	1315	1665	680		160
	488/800	35	0÷40	0,55	400/3~/50	2055	850	865	1315	1565	645		160
	488/700	35	0÷40	0,55	400/3~/50	1855	850	865	1315	1470	605		160
Q50S	488/800	35	0÷40	0,55	400/3~/50	2055	850	865	1315	1550	775		115
	488/700	35	0÷40	0,55	400/3~/50	1855	850	865	1315	1455	720		115
Q50B	488/800	35	0÷40	0,55	400/3~/50	1700	165	865	630	845	785		115
	488/700	35	0÷40	0,55	400/3~/50	1500	165	865	630	750	785		115