

# WIND 4060/8 GAS S195




- Hood with fan and pressure switch
- Computer MULTIBAKE 100 programs
- Weekly automatic start
- Electric board removable from the front for easy maintenance.
- Halogen lamps on the door, easy to change, without tools.
- Door with double glass.
- Sprayed water steamer.
- Overdimensioned heat exchanger meaning high efficiency and low consumption.
- Atmospheric strip burner for natural gas or l.p.g. (right side)
- Separate circuits for fumes and baking air.

## PROOF BOX

- Armored electric element with thermostat for heating.
- Water basin with ball-cock and electric element for humidity.
- Inner ventilation for even air distribution.
- Sliding tray support in the front.
- Electro-mechanical keyboard.

POWER INLET	400/3N~/50 WIND 230/1~/50 cell
WATER INLET	Diam 3/8"
STEAM EXHAUST	Diam 130 mm

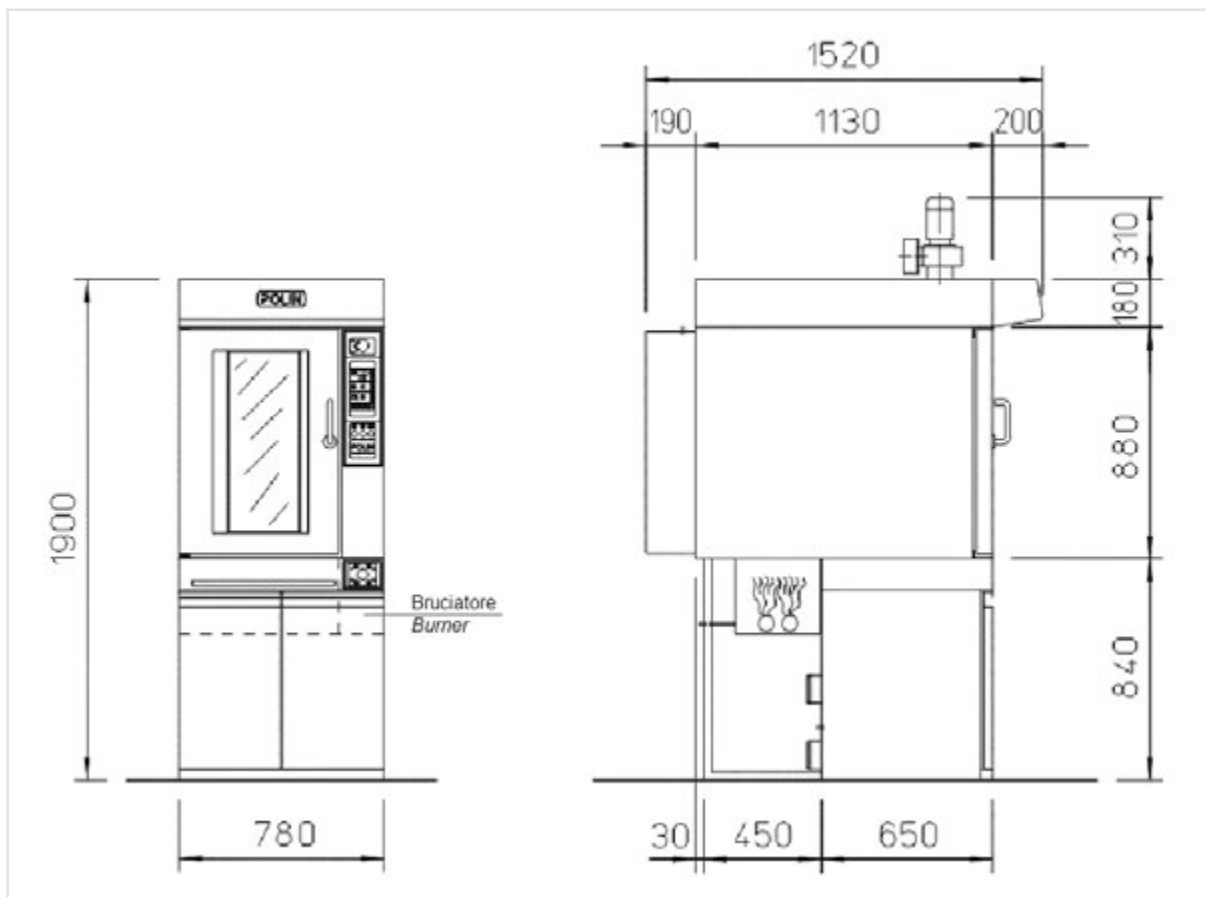

	Pan capacity		Pan size	Minimum door width	Weight	Electrical power
	n°	passo	mm	mm	kg	kW
<b>WIND 4060/8 gas</b>	8	89	400x600	790	250	1,0
<b>Cell</b>	8	80	400x600	790	70	2,0