


TV SYNT AX




- Deck useful height 22 cm
- Presetting for steamer for each deck on right side
- Deck ready for installation of supplementary steam generator
- Steam generators control by electrovalve
- Hood with double speed exhaust fan
- Deck decompression discharge valve in the mouth
- Presetting for motorised chimney shutter(optional)
- Electromechanic control board with reserve thermostat
- Baking plates in "armored concrete"
- Safety thermostat
- Doors with low emission dismountable glass.
- Safety devices in compliance with "CE" rules

Power inlet	400/3N~/50
Water inlet	Diameter 1/2" GAS
Steamer drain	Diameter 1" GAS
Steam exhaust output	Diameter 250 mm
Fume exhaust pipe	Diameter 200÷250 mm

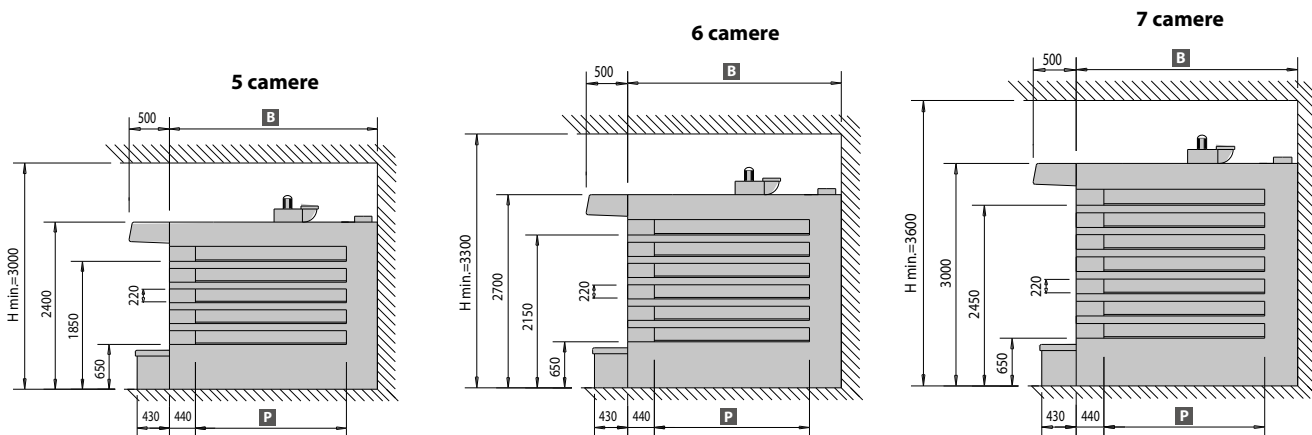

Mod. 186



	Chambers	Chambers dimensions		Overall dimension		Installed power		Minimum door width	Weight
		Height	Length	Width	Length	Thermic	Electrical		
	n°	mm	mm	mm	P mm	kcal/h	kW	mm	kg
15,8/186x170-5	5	220	1700	2645	2430	78.000	1,2	650x2250	5400
18,9/186x170-6	6	220	1700	2645	2430	90.000	1,2	650x2250	5900
22,1/186x170-7	7	220	1700	2645	2430	98.000	1,2	650x2850	6400
20,0/186x214-5	5	220	2140	2645	2870	90.000	1,2	650x2250	6550
23,8/186x214-6	6	220	2140	2645	2870	98.000	1,2	650x2250	7200
27,8/186x214-7	7	220	2140	2645	2870	125.000	1,2	650x2850	7850
24,0/186x258-5	5	220	2580	2645	3310	98.000	1,2	650x2250	7300
28,8/186x258-6	6	220	2580	2645	3310	125.000	1,2	650x2850	7850
33,5/186x258-7	7	220	2580	2645	3310	140.000	1,2	650x2850	9000