


TV SYNCRON



- Nr. 3 steam tube decks heated by burner
- Top deck electric and independent with mass ceramic electric elements
- Maximum working temperature 350 °C for electric deck
- Nr. 1 steam generator per deck with electrovalve
- Steam pipes decks ready for installation of supplementary steam generator
- Baking plates in " armored concrete".
- Nr. 1 steam exhaust valve each deck
- Hood with one speed exhaust fan
- Automatic adjustment of front temperature (electric deck).
- Safety thermostats for steam pipes decks, steam generators and electric deck
- Doors with low emission dismountable glass (lever opening at three positions: open, closed, intermediate, for width 84)
- Motorised chimney shutter
- Steam generators control by electrovalve with timer.
- Daily and weekly automatic start
- Baking timer
- Steam exhaust fan with a sealed cast aluminium scroll
- "Avant" type design front and removable hood front (excluding W=84)
- High efficiency combustion chambers (excluding W=84)
- Stainless steel steam exhaust duct (excluding W=84)
- Cast aluminum door hooks (excluding W=84)

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ½" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	----
<i>Steam exhaust output</i>	Mod. 84 Ø 150 mm Ø 250 mm*
<i>Fume exhaust pipe</i>	Ø 200 mm
<i>Frontal door (anti-explosion and clearing access)</i>	Pos.1

* Minimum diameter pipe exhaust fumes 200 mm.

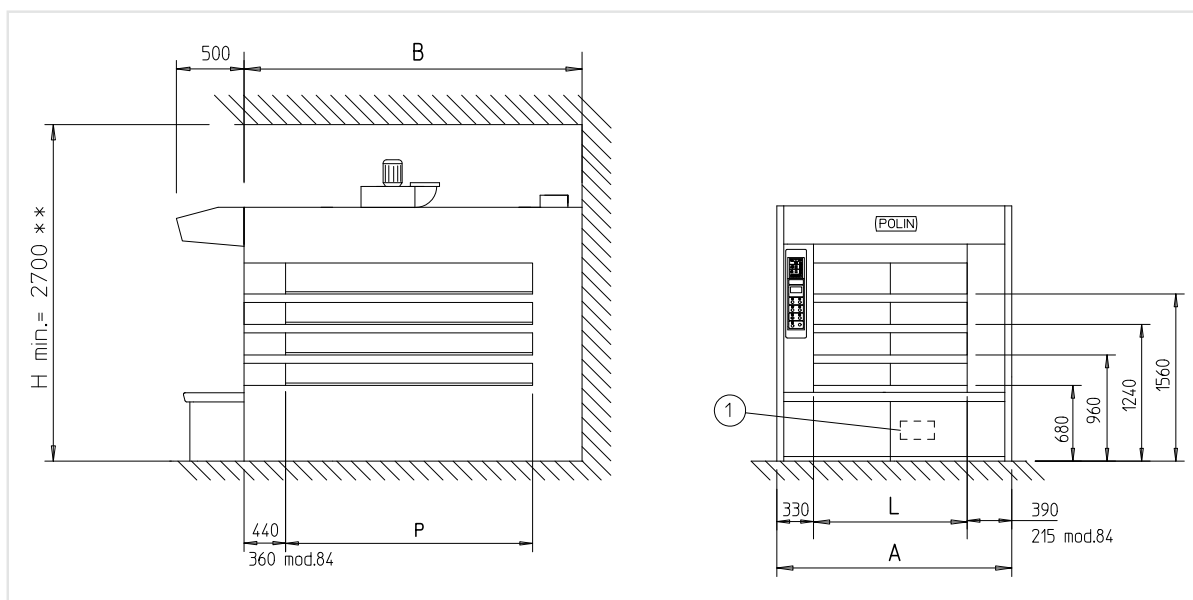

** 2800 with a 2 speed motor

	Chambers	Baking Surface	Dim.	Useful dimension chambers					Installed power			Minimum door width	Weight
				Length	Height				Thermic	Electrical	Super Power		
	n°	mq	B mm	P mm	1°mm	2°mm	3°mm	4°mm	kcal/h	kW		mm	kg
4,2 / 84x126-4	3+1	4,2	1910	1260	200	200	200	250	35.000	8,7	12,8	650x1180	2.150
5,7 / 84x170-4	3+1	5,7	2350	1700	200	200	200	250	40.000	9,9	15,1	650x1180	2.750
7,2 / 84x214-4	3+1	7,2	2790	2140	200	200	200	250	45.000	11,6	18,6	650x1180	3.350
8,7 / 84x258-4	3+1	8,7	3230	2580	200	200	200	250	56.000	13,9	22,6	650x1180	3.950
8,4 / 124x170-4	3+1	8,4	2430	1700	200	200	200	250	48.000	11,7	18,0	650x1580	3.600
10,6 / 124x214-4	3+1	10,6	2870	2140	200	200	200	250	56.000	13,8	22,2	650x1580	4.250
12,8 / 124x258-4	3+1	12,8	3310	2580	200	200	200	250	60.000	15,9	26,4	650x1580	4.800
10,6 / 156x170-4	3+1	10,6	2430	1700	200	200	200	250	56.000	13,4	21,0	650x1900	4.100
13,5 / 156x214-4	3+1	13,5	2870	2140	200	200	200	250	65.000	15,9	26,1	650x1900	4.850
16,0 / 156x258-4	3+1	16,0	3310	2580	200	200	200	250	70.000	18,5	31,2	650x1900	5.550
12,5 / 186x170-4	3+1	12,5	2430	1700	200	200	200	250	60.000	13,9	22,0	650x2200	4.550
16,0 / 186x214-4	3+1	16,0	2870	2140	200	200	200	250	70.000	16,6	27,4	650x2200	5.450
19,0 / 186x258-4	3+1	19,0	3310	2580	200	200	200	250	78.000	19,3	32,0	650x2200	6.250