


# ROTOAVANT FB



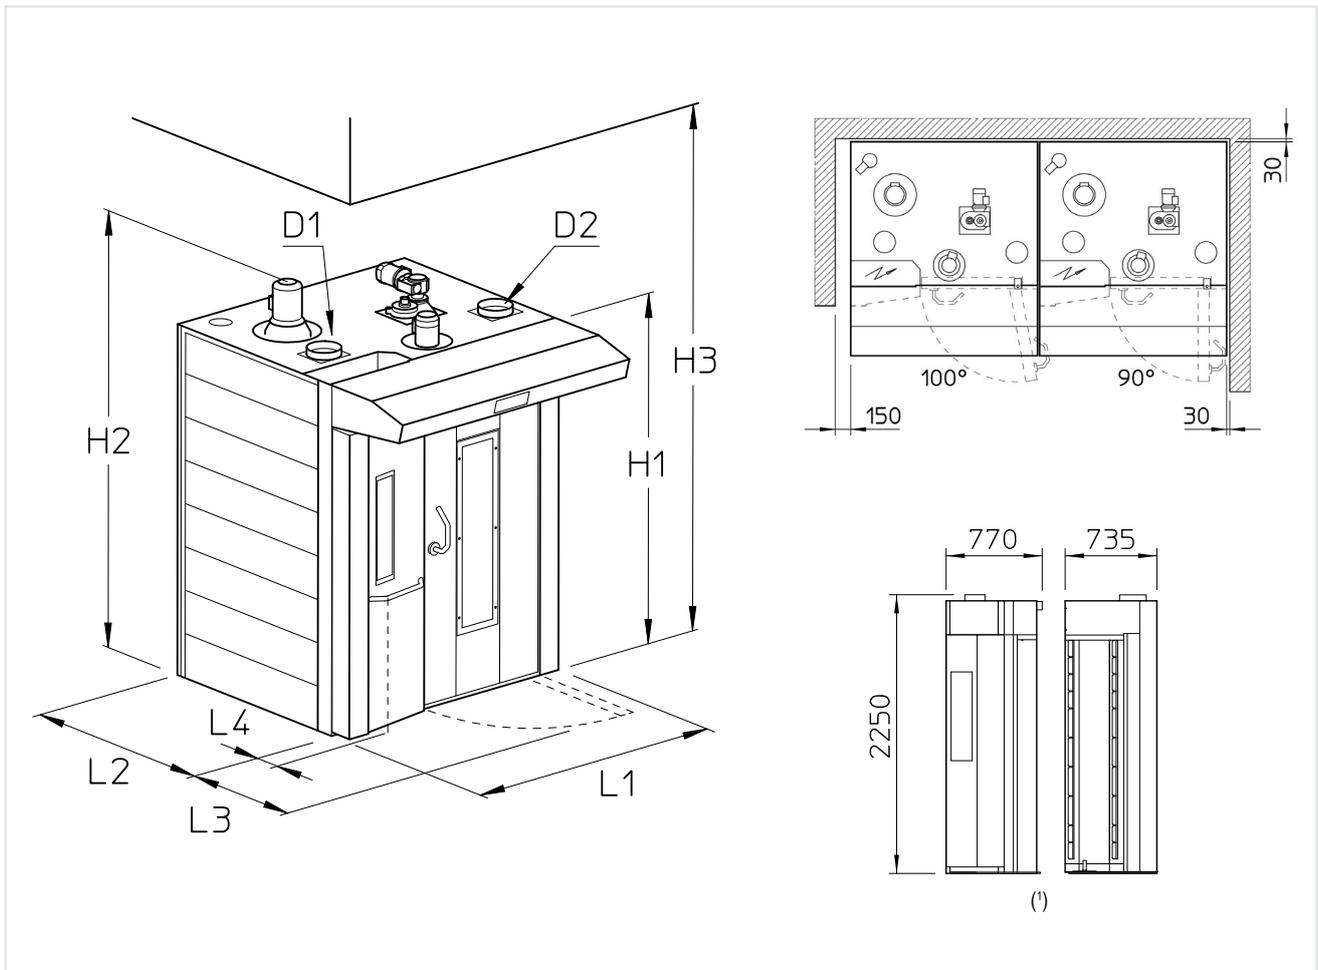

Modello Model		L1 mm	L2 mm	L3 mm	L4 mm	H1 mm	H2 mm	H3 mm	Scarico fumi Fume exhaust D1 mm	Scarico vapore Steam exhaust D2 mm
4676	SC	1460	1390	773	203	2200	2525	2750	150	200
	SE								-	200
6080	SC	1836	1455	918	218	2300	2630	2840	200	200
	SE								-	200
80100	SC	2250	1735	1128	187	2400	2740	2980	200	200
	SE								-	200

Modello Model	Capacità padelle Tray capacity		Dimensioni padelle Tray size mm	Dimensione minima porta locale Minimum door size mm	Peso Weight kg	SC		SE	
	N°	Passo / Pitch mm				kW	kcal/h	Standard	Potenziata Powered
			kW	kW					
4676	15	105	460x760	780x2260	1.300 SC 1.250 SE	2,1	~44.740 (52,0 kW)	40,8	50,5
	18	87							
6080	16	105	600x800 N° 2 600x400	500	1.500 SC 1.450 SE	2,3	~60.000 (69,8 kW)	50,8	60,5
	18	93							
80100	16	105	800x1000	580 (²)	1.950 SC 1.900 SE	3	~80.000 (93 kW)	65,8	-
	18	93							

(¹) SOLO MODELLO 4676 SPEDITO IN 2 ELEMENTI PREMONTATI / ONLY MODEL 4676, SHIPPED IN 2 PREASSEMBLED ELEMENTS

(²) 1020X2470 SE SPEDITO A BLOCCHI / 1020X2470 IF IT SENT IN BLOCKS

## CARATTERISTICHE DI SERIE

### RANGE DI FUNZIONAMENTO

- Temperatura massima 300°C

### LAYOUT

- Bruciatore sul lato frontale

### STRUTTURA

- Design tipo "Avant"
- Porta di grosso spessore (110mm)
- Porta con cerniere a destra
- Porta con doppio vetro
- Vetro porta di grandi dimensioni per una notevole visibilità e grande illuminazione
- Sistema di chiusura con doppio aggancio
- Rivestimento in acciaio inox

### CIRCUITO ARIA

- Grande portata aria di cottura e bassa velocità in camera garantiscono un'ottima uniformità e una rapida trasmissione del calore al prodotto per un miglior sviluppo
- Ampie sezioni dei condotti d'aria consentono di cuocere con bassa velocità aria per prodotti più delicati
- Uniformità di cottura e facilità di regolazione grazie alla particolare forma dei condotti mandata aria e al frazionamento dei registri
- Sistema di accumulo calore per contrastare il calo di temperatura all'infornamento

### GENERATORE DI CALORE

- Camera di combustione ad alto rendimento grazie alla notevole superficie radiante, ad un carico termico elevato, alla quantità di acciaio refrattario utilizzato e al particolare disegno che permette un mantenimento delle superfici di scambio a temperature ideali per una notevole durata

### VAPORE

- Vaporiera modulare a sfere
- Tenuta al vapore con sistema composto da guarnizione siliconica e struttura in acciaio
- Sistema esclusivo di turbolenze per la distribuzione del vapore in camera durante la vaporizzazione
- Rapido recupero della temperatura delle vaporiere grazie alla loro integrazione nel flusso d'aria
- Impianto di scarico vaporiere in acciaio inox

### SCARICO VAPORI

- Cappa con aspiratore vapori
- Aspiratore vapori ad 1 velocità
- Aspiratore vapori in alluminio con girante inox
- Valvola automatica scarico vapori
- Sistema di recupero del vapore sul fronte del forno
- Sistema scarico vapori (Fast Air) - raffreddamento rapido (Rapid Cooling)

### IMPIANTO ELETTRICO

- Presa USB su pannello frontale
- Quadro elettrico integrato nel vano tecnico
- Predisposizione connessione gestione remota BakeAPP (¹)

### MOVIMENTAZIONE CARRELLO

- Gruppo rotazione standard con frizione e gancio

### ALIMENTAZIONE ELETTRICA STANDARD

- 400/50/3N

## STANDARD FEATURES

### OPERATING RANGE

- Maximum temperature 300°C

### LAYOUT

- Burner on the front side

### STRUCTURE

- "Avant" type design
- Large thickness doors (110mm)
- Door hinges on the right side
- Double glass Door
- Big size glass door for a great visibility and great lighting system
- Double hook closure system
- St/St external panel

### AIR CIRCUIT

- The high baking AIR delivery and the low speed in the baking chamber ensure an excellent uniformity and a rapid heat Transmission to the product for its better development
- The great sections of the air pipes enables to bake at a low air speed for the most delicate products
- Baking uniformity and easy adjustment thanks to the special shape of the air delivery pipes and to the dampers
- Heat build-up to contrast the temperature drop when loading the oven

### HEAT GENERATOR

- High performance combustion chamber thanks to the great radiant surface, to the high thermal load, to the amount of refractory steel employed and to the particular design permitting to keep the exchange surfaces at ideal temperature for a long duration

### STEAM

- Steamer with spheres
- Steam tightness by a system composed of a silicon gasket and a steel frame
- Exclusive turbulence system to distribute steam into the chamber during steaming
- Quick recovery of the steamer temperature thanks to their integration in the air flow
- Steamer condensate drain in stainless steel

### STEAM EXHAUST

- Hood with exhaust fan
- Steam exhaust fan at 1 speed
- Exhaust fan in aluminium with stainless steel impeller
- Automatic steam discharge damper
- Steam recovery system on the oven front
- Steam exhaust system (Fast Air) - Rapid cooling system

### ELECTRIC INSTALLATION

- USB connection on front side
- Electrical box integrated in the heating system area
- Prearrangement for remote management connection BakeAPP (¹)

### RACK MOVEMENT

- Standard rotation group with clutch and hook

### STANDARD POWER SUPPLY

- 400/50/3N

(¹) SOFTWARE E HARDWARE ESCLUSO / SOFTWARE AND HARDWARE EXCLUDED