


ROTOAVANT FB



- Heat generator with front access
- Integrated electric board with front access
- Only model 4676, shipped in 2 preassembled elements (installation in few hours) or completely assembled (as option)
- Model 6080 is supplied in single elements like Roto Avant or completely assembled (as option)
- Model 80100 is supplied in single elements or on request in three elements
- Automatic steam exhaust system (Fast Air)
- Automatic start
- Hood with exhaust fan and grill
- Door with double low emissivity glass and double closing
- Standard rotation device with clutch and hook (due to ergonomic reasons it is recommended for racks with up to 100 kg full load)
- Heat generator with armored heating elements (SE)
- Steam generator with cascade elements with spheres
- Preset for automatic lever lifting device (as option)
- Rack height: 1815 mm for model 4676 and 1920 mm for model 6080 and 80100
- For model 4676: standard st/st exterior panel
- For model 6080 and 80100: exterior panel in pre-painted metal sheet (st/st as option)

<i>Power inlet</i>	400/3N~/50
<i>Steam exhaust output</i>	Ø 200 mm
<i>Fume exhaust output</i>	Ø 150 mm (4676) Ø 200 mm (6080 - 80100)

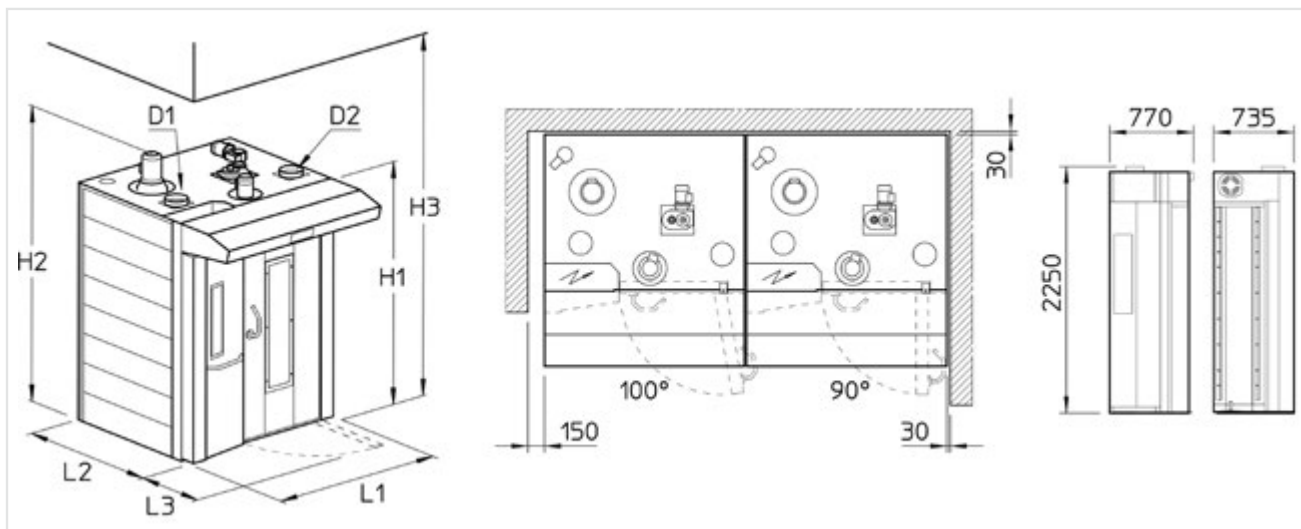

	Pan capacity	Pan size	Minimum door width	Weight	Voltage	SC version		SE version	
								Standard	Potentiated
	n°	passo	mm	mm	kg	kW	kcal/h	kW	kW
ROTOAVANT 4676 FB	15	105	460x760	780x2260	1300 SC 1250 SE	2,1	~44.740	40,8	50,5
	18	87							
ROTOAVANT 6080 FB	16	105	600x800 N° 2 600x400	500	1500 SC 1450 SE	2,3	~60.000	50,8	60,5
	18	93							
ROTOAVANT 80100 FB	16	105	800x1000	580**	1950 SC 1900 SE	3	~80.000	65,8	-
	18	93							

(**) 1020x2470 if it sent in blocks

