TV SYNT 840

- N° 1 steam generator for each deck
- Hood with exhaust fan
- Steam generators control by electrovalve with timer (SIMPLE excluded)
- Baking plates in “armored concrete”
- Doors with detachable crystal with three-position lever opening (open, closed, intermediate)
- Dismountable glass doors with lever opening
- Motorised chimney shutter (excluding SIMPLE)
- Presetting for shipment of oven fully assembled
- Automatic start (excluding SIMPLE)
- Baking timer (excluding SIMPLE)

Power inlet	400/3N~/50
Water inlet	Ø ½" GAS
Steamer drain	Ø 1" GAS
Fuel pipe inlet	-------
Steam exhaust pipe	Ø 150 mm
Fume exhaust pipe	Ø 200 mm
Frontal door (anti-explosion and clearing access)	Pos.1
Right door for furnace (optional)	Pos.2
Cleaning access door (optional)	Pos.3

	Chambers	Baking Surface	Dim.	Useful dimension chambers						Installed power		Minimum door width	Weight
				Length	Height					Thermic	Electrical		
	n°	mq	B mm	P mm	1°mm	2°mm	3°mm	4°mm	5°mm	kcal/h	kW	mm	kg
3,2 / 84x126-3	3	3,2	1910	1260	200	200	250	-	-	32.000		650x1850	1.900
4,2 / 84x126-4	4	4,2	1910	1260	200	200	200	250	-	32.000		650x2000	2.200
5,3 / 84x126-5	5	5,3	1910	1260	170	170	170	170	250	35.000		650x2100	2.500
4,3 / 84x170-3	3	4,3	2350	1700	200	200	250	-	-	35.000		650x1850	2.500
5,7 / 84x170-4	4	5,7	2350	1700	200	200	200	250	-	40.000		650x2000	2.800
7,1 / 84x170-5	5	7,1	2350	1700	170	170	170	170	250	48.000		650x2100	3.100
5,4 / 84x214-3	3	5,4	2790	2140	200	200	250	-	-	40.000	1,0	650x1850	3.000
7,2 / 84x214-4	4	7,2	2790	2140	200	200	200	250	-	56.000		650x2000	3.400
9,0 / 84x214-5	5	9,0	2790	2140	170	170	170	170	250	60.000		650x2100	3.800
6,5 / 84x258-3	3	6,5	3230	2580	200	200	250	-	-	56.000		650x1850	3.550
8,7 / 84x258-4	4	8,7	3230	2580	200	200	200	250	-	60.000		650x2000	4.000
10,8 / 84x258-5	5	10,8	3230	2580	170	170	170	170	250	65.000		650x2100	4.450

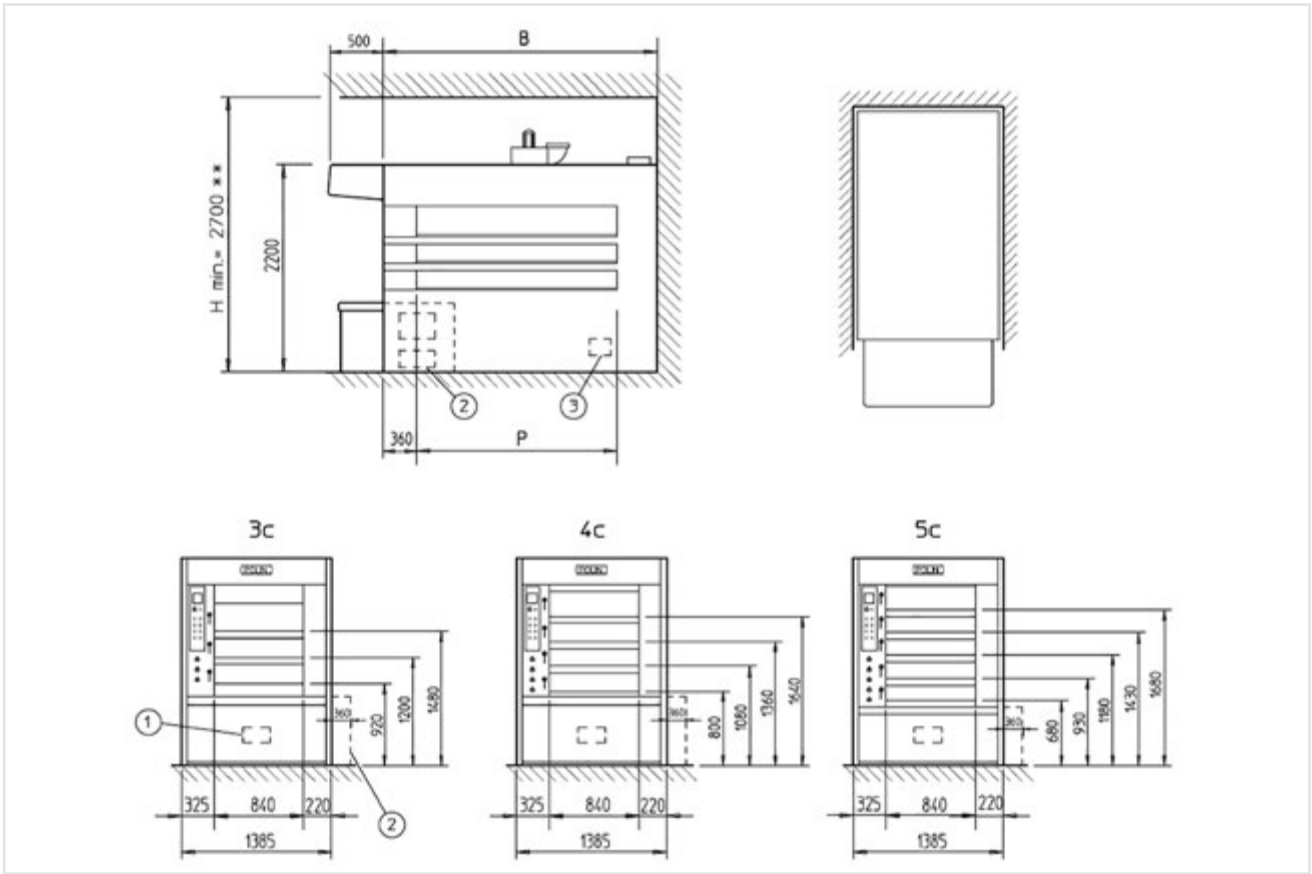

Ing. POLIN e C. S.p.A.
Viale dell'Industria, 9 - 37135 Verona - Italy - Tel. +39 045 8289111 - www.polin.it - polin@polin.it