


TV DRAGO PELLETT 200



- N° 1 steamer for each deck
- Hood with exhaust fan
- Double speed exhausting hood (only for width 186 - 248)
- Motorised chimney shutter
- Safety thermostat
- Steam generators' control by electrovalve with timer
- Emergency wood body furnace frontal (without grids and door - optional)
- Baking plates in "armored concrete"
- Doors with low emission dismountable glass
- Automatic start
- Aided draught kit
- Available in versions SMART 0.8H and 0.20H and HI CONTROL 0.20H depending on working hours

<i>Power inlet</i>	400/3N~/50
<i>Water inlet</i>	Ø ½" GAS
<i>Steamer drain</i>	Ø 1" GAS
<i>Fuel pipe inlet</i>	-----
<i>Steam exhaust output</i>	Ø 250 mm*
<i>Fume exhaust output</i>	Ø 200 mm
<i>Frontal door (anti-explosion and cleaning access)</i>	Pos.1
<i>Inspection rear flue cleaning</i>	Pos.2
<i>Side rear cleaning door (Optional burner flame horizontal)</i>	Pos.3

* Minimum diameter pipe exhaust fumes 200 mm.

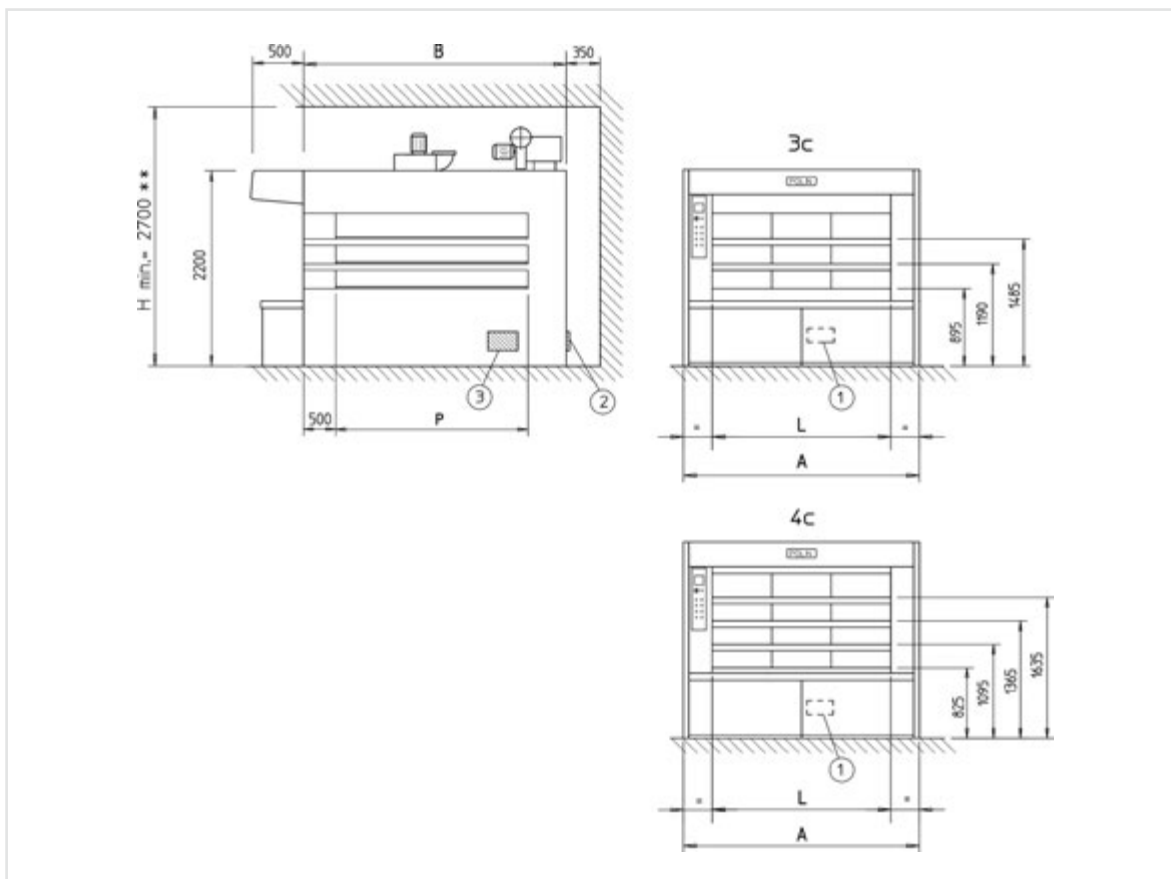

	Chambers	Baking Surface	Dim.	Useful dimension chambers						Installed power		Minimum door width	Weight
				Length	Height					Thermic	Electrical		
	n°	mq	B mm	P mm	1°mm	2°mm	3°mm	4°mm	5°mm	kcal/h	kW	mm	kg
6,3 / 124x170-3	3	6,3	2575	1700	200	200	250	-	-	65.000			5.850
8,4 / 124x170-4	4	8,4	2575	1700	170	170	170	250	-	70.000			6.500
8,0 / 124x214-3	3	8,0	3015	2140	200	200	250	-	-	70.000	2,0	650x1850	6.850
10,6 / 124x214-4	4	10,6	3015	2140	170	170	170	250	-	75.000			7.600
9,6 / 124x258-3	3	9,6	3455	2580	200	200	250	-	-	73.000			7.830
12,8 / 124x258-4	4	12,8	3455	2580	170	170	170	250	-	80.000			8.700
9,4 / 186x170-3	3	9,4	2575	1700	200	200	250	-	-	78.000			6.750
12,5 / 186x170-4	4	12,5	2575	1700	170	170	170	250	-	80.000			7.750
12,0 / 186x214-3	3	12,0	3015	2140	200	200	250	-	-	85.000	2,5	650x1850	7.850
16,0 / 186x214-4	4	16,0	3015	2140	170	170	170	250	-	93.000			8.950
14,0 / 186x258-3	3	14,0	3455	2580	200	200	250	-	-	90.000			8.950
19,0 / 186x258-4	4	19,0	3455	2580	170	170	170	250	-	96.000			10.330
12,6 / 248x170-3	3	12,6	2575	1700	200	200	250	-	-	85.000			7.700
16,8 / 248x170-4	4	16,8	2575	1700	170	170	170	250	-	96.000			8.900
16,0 / 248x214-3	3	16,0	3015	2140	200	200	250	-	-	98.000			8.770
21,2 / 248x214-4	4	21,2	3015	2140	170	170	170	250	-	115.000	2,5	650x1050	10.200
19,2 / 248x258-3	3	19,2	3455	2580	200	200	250	-	-	105.000			4.950
25,6 / 248x258-4	4	25,6	3455	2580	170	170	170	250	-	125.000			11.500