

SCOOTER 4666




- Hood with fan
- Overdimensioned heat exchanger meaning high efficiency and low consumption. (SC)
- Atmospheric strip burner for natural gas or L.P.G. (SC)
- 9 shelves not removable rack supplied as standard
- Extractable trolley (optional)
- Separate circuits for fumes and baking air. (SC)
- Armored el/elements heat generator. (SE)
- Automatic start
- Halogen lamps on the door, for easy replacement without tools.
- Door with double glass.
- Option: steamer with liter-counter

PROOF BOX

- Armored el/element with thermo stat for heating.
- Water basin with ball-cock and electric element for humidity.
- Inner ventilation for even air distribution.
- Electro-mechanical keyboard.
- Humidity control kit (optional)

POWER INLET	400/3N~/50 Scooter 230/1~/50 cella
WATER INLET	Diametro 1/2"
GAS PIPE INLET	Diametro 3/4"
FUMES EXHAUST	Diametro 150 mm
STEAM EXHAUST	Diametro 120 mm

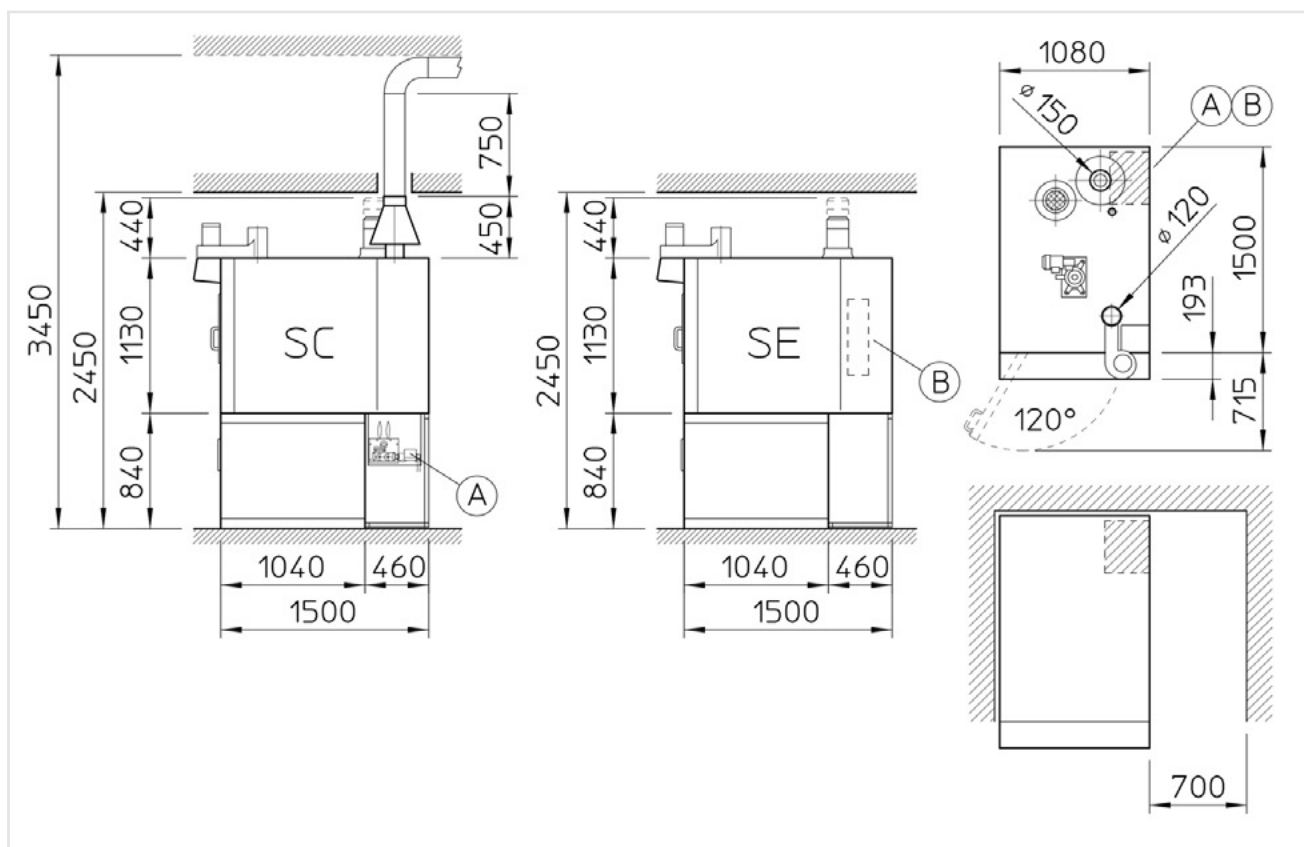

	Pan capacity		Pan size	Minimum door width	Weight	Electrical power	
	n°	passo	mm	mm	kg	kW	
SCOOTER 4666/9	7 9	102 80	400x600 460x660	1100	350	1,3	
CELL	14	88	400x600	850	80	2,0	

