

530T AVANT 'TOUCH' CROISSANT UNIT




ALL MACHINES ARE EQUIPPED WITH:

- Reclining feeding belt
- Moulding unit with moulding belts and feeding belt easy to dismantle, reclining exit belt and useful tools holder
- St/st carters
- Wheels
- N°1 st/st rolling pin
- Belt to collect cut pieces (optional)
- Mould max useful width 530 mm
- Orientator conveyor with pneumatic control

SAFETY DEVICES

- Electric system and panel as per en 60204; insulation as per ip54
- 24 Volt control panel
- Electric panel with door lock switch
- Safety guards with limit switches to stop the machine as per en294
- All materials coming in contact with the product fulfil all hygiene requirements

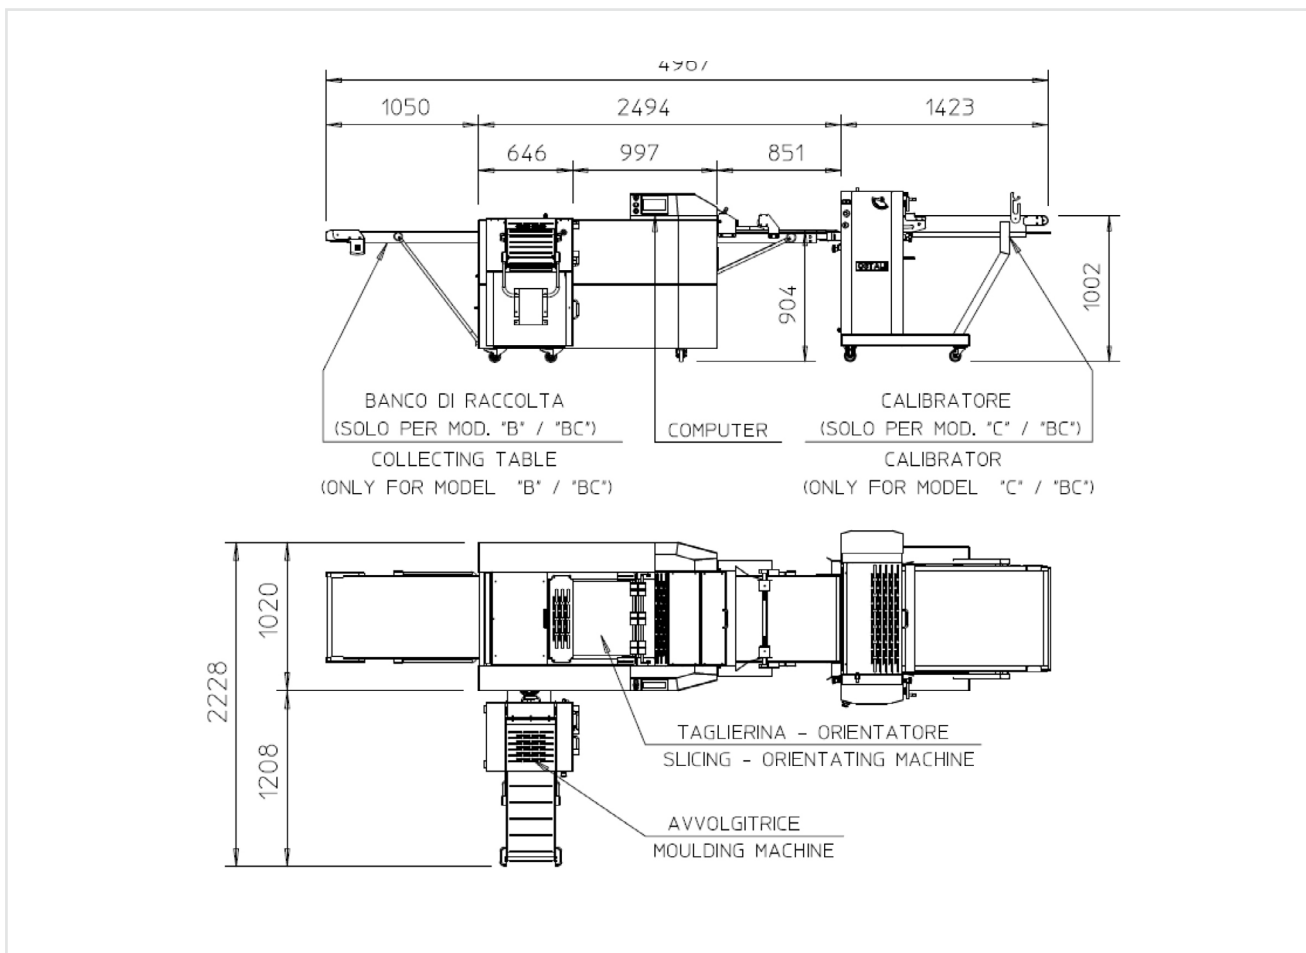

TIPO TYPE	PRODUZIONE ORARIA* PRODUCTION PER HOUR* Pezzi/ora - Pieces/h					POTENZA Power kW	PESO Weight kg	TENSIONE DI ALIMENTAZIONE Supply voltage V400/3~/50Hz	PORTATA D'ARIA RICHIESTA Required air flow NI/h 6 BAR
	Numero triangoli per fila / Triangles per row								
	2	3	4	5	6				
530T AVANT 'TOUCH' (ALTEZZA TRIANGOLO) (TRIANGLE HEIGHT)	2000 (H=265)	3000 (H=175)	4000 (H=133)	5000 (H=106)	6000 (H=87)	1,7	715	V400/3~/50Hz	3700
							750 (B)		
							1065 (C)		
							1100 (BC)		

(*): Hourly production mentioned in the chart are approximate and can vary a lot according to the type of dough.

